



Toll Free: 866-288-2522

POWER GENERATION FILTRATION




PMF's **SINTERPORE®** laminate and sintered fiber filter media are designed to meet the challenges faced by today's power generation industry. All of our filters are designed and manufactured for:

- New installations or optimum retrofit to existing filtration housings and systems.
- Fuel pool clean-up filter demineralizers (FCPU F/D)
- Reactor water clean-up (RWCU)
- Condensate filter demineralizers (F/D)
- Laterals and traps

FEATURES AND BENEFITS OF **SINTERPORE®** FILTERS

- Rigid and robust design
- High collapse strength
- Extended run times
- Filtration consistency


Optimization of all these factors will have an impact on capital and operating costs as well as product quality and market position. **PMF's fundamental understanding of filtration concepts, technologies and the end users basic filtration needs will make that optimization possible.**



Trap



Trap

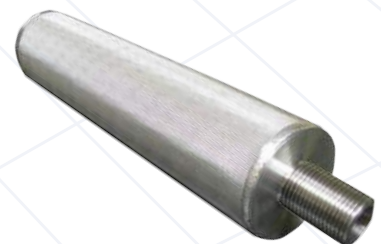

Lateral

Porous Metal Filters, Inc.
19994 Hickory Twig Way, Spring TX, 77388
Toll Free: 866-288-2522 Tel: 281-719-1352 Fax: 281-719-1351
www.pmfiler.net sales@pmfilter.net



Technical information is subject to change



Toll Free: 866-288-2522


POWER GENERATION FILTER CARTRIDGES

WHAT SEPARATES A GREAT FILTER MANUFACTURER FROM THE OTHERS?

- Exceptional customer service
- Product quality
- Fast and reliable information
- Professional and positive attitude

We welcome the opportunity to help with your industrial filter needs.

THE PMF SCREEN CODE IS ILLUSTRATED BELOW

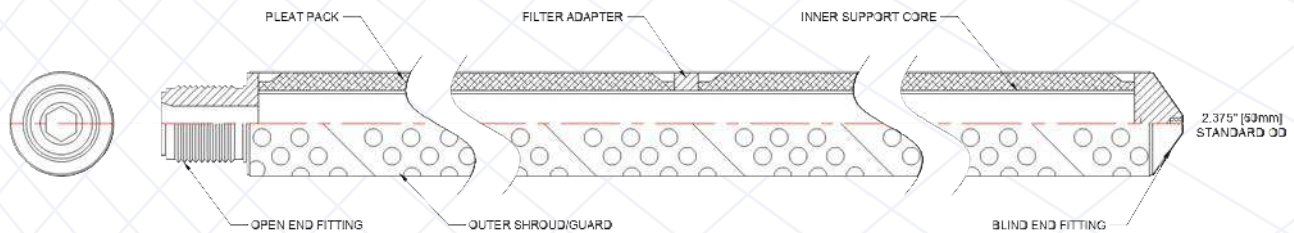

STANDARD CARTRIDGE ORDER CODE

316L Media Type

PFC	Sintered Fiber Media, Cylinder
PFP	Sintered Fiber Media, Pleated
PWC	Wire Mesh, Cylinder
PWP	Wire Mesh, Pleated
PLS	Sintered Laminate, Cylinder
PLP	Sintered Laminate, Pleated

Micron Rating

5	40	100
10	60	150
20	70	
30	80	

Fitting Metallurgy

S	316L
N	Nitronic 60

PFC 5 S 10 AF B

Elastomers

B	Buna N
N	Neoprene
V	Viton
E	EPDP
P	PTFE

Inlet/Cap Fitting Configuration

A	Female 1" NPT
B	Male 1" NPT
C	Open Gasket Fitting
D	Standard 222 double O-rings
E	Standard 226 double O-rings
F	Blind end

Cartridge Length

10	10" - 250 mm
20	20" - 500 mm
30	30" - 750 mm
40	40" - 1000 mm

Custom media, media alloys, fitting configurations, gasket materials and lengths available upon request

Porous Metal Filters, Inc.

19994 Hickory Twig Way, Spring TX, 77388

Toll Free: 866-288-2522 Tel: 281-719-1352 Fax: 281-719-1351

www.pmfiler.net

sales@pmfilter.net



Technical information is subject to change